



# 2 Humbuckers, 1 Volume, 3 Way Switch

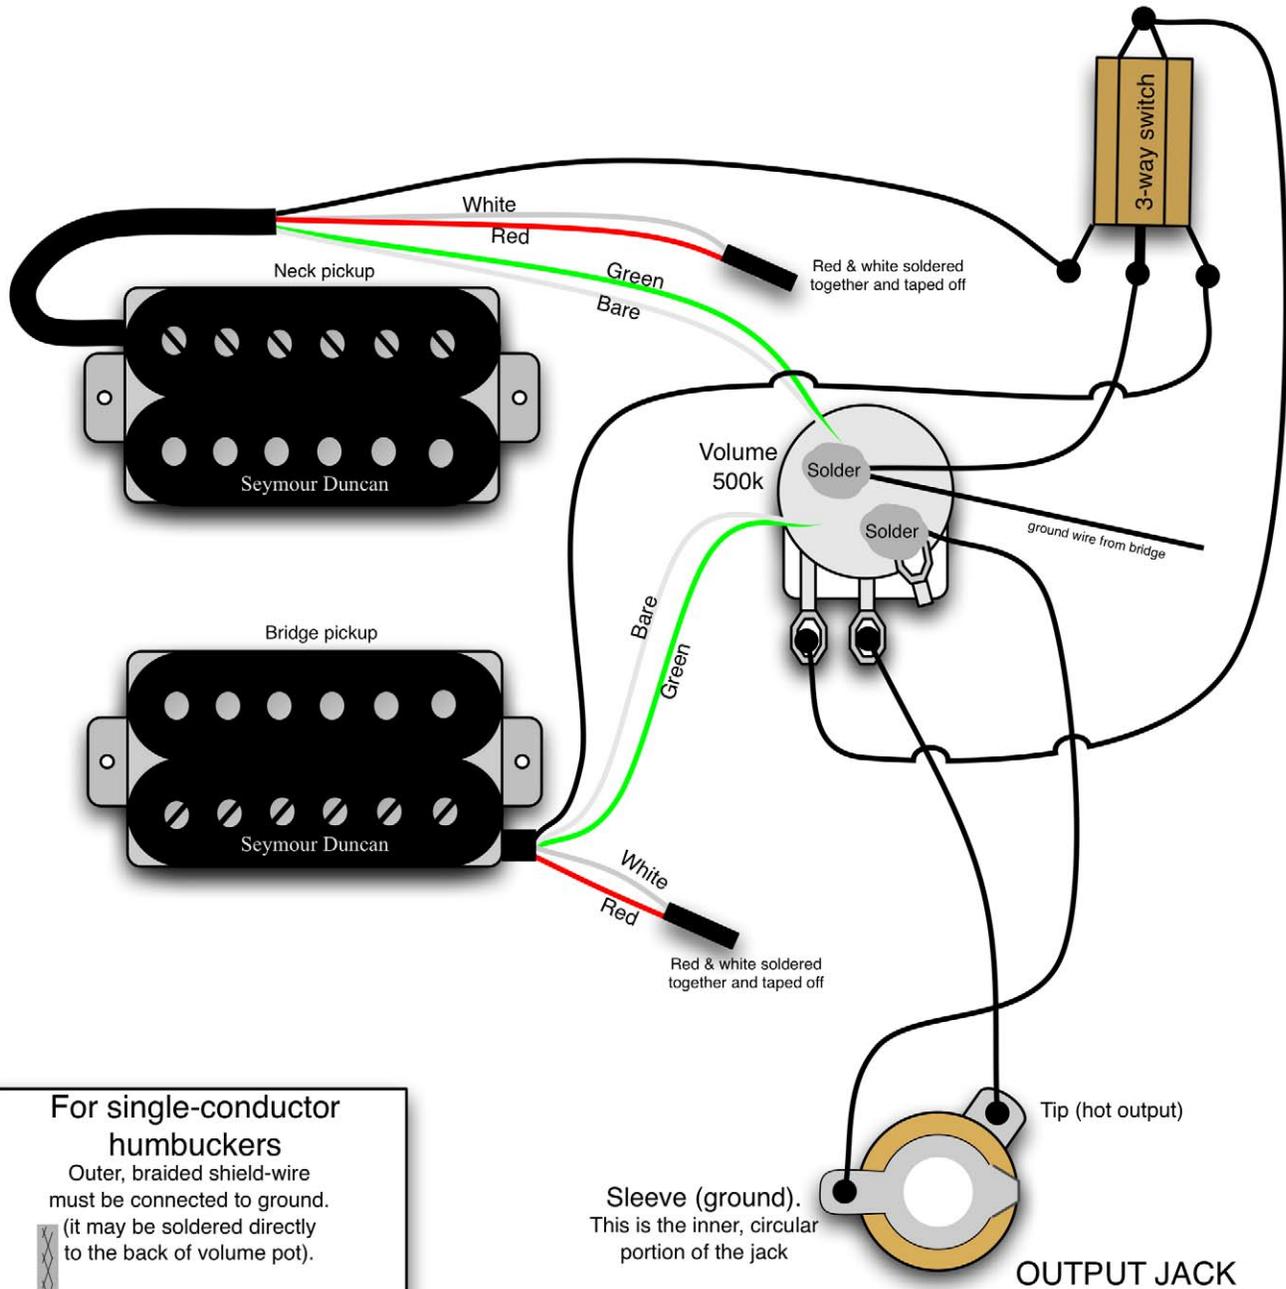

**For single-conductor humbuckers**  
Outer, braided shield-wire must be connected to ground. (it may be soldered directly to the back of volume pot).



Inner, black cloth wire is the hot output. It connects to the 3-way switch

 = ground.  
These symbols are located where the actual solder connections should be.



**Seymour  
Duncan®**

5427 Hollister Ave. • Santa Barbara, CA. 93111  
Phone: 805.964.9610 • Fax: 805.964.9749 • Email: [wiring@seymourduncan.com](mailto:wiring@seymourduncan.com)